




Glass Bubbler Assembly

Type Designation	GBA
Temperature Range	0 to 1200 ° C
Common Materials	Alloy 600 sheath
Common Outside Diameters	Ø 12.7mm to 27mm
Hole configuration	2, 3, 4 5, or 6 bore
Common hole size	Ø 0.8mm, Ø 1.0mm
Application Notes	<ul style="list-style-type: none"> ■ Custom designs for glass tank stirring
Special Options	<ul style="list-style-type: none"> ■ Alternative sheath materials ■ Gas fittings on cold end – elbow or straight ■ Other hole sizes available ■ Other outside diameters available

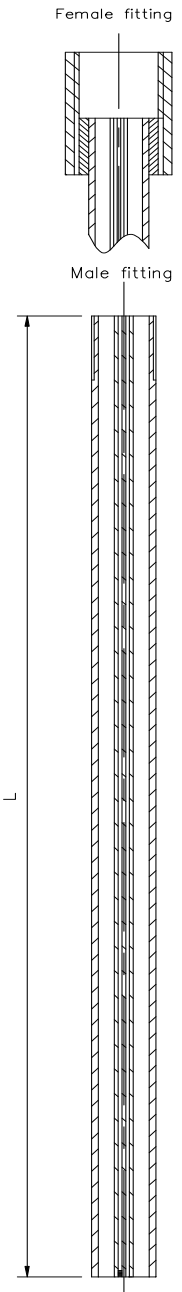

Visit the Peak Sensors Online design guide at
www.peaksensors.com

PEAK SENSORS LTD
 Kelvin House | Station Lane Industrial Estate | Chesterfield | S41 9QX | United Kingdom
 TEL: **+44 (0)1246 261999** | FAX: **+44 (0)1246 261888**

The technical information provided on any pages of the Peak Sensors brochure is advisory only and should not be relied on for any design, process or production. We will be pleased to undertake specific technical advisory work under our normal terms of service. Peak Sensors Ltd accepts no responsibility for any loss or damage caused through reliance on any information contained therein.